

↑ EZee Life™

REHAB SHOWER COMMODES

Traditionally, rehab shower commodes have been constructed of steel or stainless steel. These two materials had their drawbacks. Steel rusts, stainless steel is expensive and both are heavy. Ezee Life™ commodes are constructed of high quality aluminum that won't rust, is lighter than steel and lower in cost than stainless steel.


**TWO CASTER
OPTIONS:
STANDARD OR LONG
STEMMED CASTERS
STANDARD STEM PART # SSC
LONG STEM PART # LSC**



New locking flip up arms.



Optional 4 Way Seat

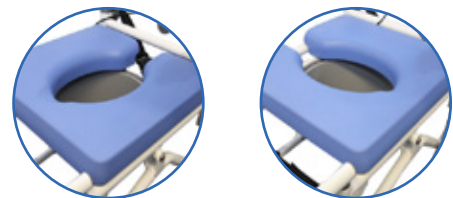

Anti tippers
on all models



Height adjustable
on all models



Open Front Seat & Insert



Standard on all sizes

Closed Front Seat & Top



Available on 180, 185 & 186 Models

4-Way Open Seat



Available on 180

Removable snap on seat (all models)



STANDARD FEATURES:

- Lightweight aluminum **NO RUST**
- Footrest, adjustable height & removable
- Removable insert cushion for showering or toileting
- Quick Release axles (self propelled models)
- Four 5" locking casters
- Slide on pail, removable
- Flip back arms
- Maintenance free tires
- Calf strap included
- Molded handrims
- Super soft seat
- Easier rolling
- Seat belt
- All adjustments are tool-less
- 1 Year full warranty
- 2 Year warranty on frame

COMMODOE MODELS	
Model Codes	Seat Width
150	15"
180	18"
185	20"
186	22"
Model numbers indicate the seat size of the commode.	

OPTIONAL EQUIPMENT AND FEATURES		
Option Codes	Option Name	Availability
4W	4 Way seat	All 18" Commodes
CSF18	18" Closed Front Seat	All 18" Commodes
CSF 20	20" Closed Front Seat	All 20" Commodes
CSF 22	22" Closed Front Seat	All 22" Commodes
22	22" Rear Wheels	15" Commodes
24	24" Rear Wheels	18", 20" & 22" Commodes
LSC	Long Stem Casters	All Commodes
*Add the option codes above to the model numbers to select		
*Open Front Seat and 5" Rear Casters Standard on All Models		

SPECIFICATIONS	150, 150-22	180, 180-4W, 180-24, 180-4W-24	185 Wide, 185-24	186 X-Wide, 186-24
Frame Material	Aluminum	Aluminum	Aluminum	Aluminum
Weight Capacity	286 lbs (130 kgs)	286 lbs (130 kgs)	385 lbs (175 kgs)	440 lbs (200 kgs)
Rear Wheels	5" locking casters	5" locking casters	5" locking casters	5" locking casters
Optional Rear Wheels	22" (150-22)	24" (180-24)	24" (185-24)	24" (186-24)
Seat Width	15"	18"	20"	22"
Seat Depth	15"	17"	17"	17"
Foot Rest Hanger Angle	60°	60°	60°	60°
Foot Rest Length	14" to 20"	14" to 20"	14" to 20"	14" to 20"
Back Height	18"	18"	18"	18"
Weight (4 - 5" Casters)	26.4 lbs (12 kgs)	30.4 lbs (13.8 kgs)	31.5 lbs (14.3 kgs)	32.4 lbs (14.7 kgs)
Weight (5 Casters / SP Wheels ³)	37.5 lbs (17 kgs)	40.8 lbs (18.5 kgs)	41.9 lbs (19 kgs)	42.8 lbs (19.4 kgs)
Arm Height	11" (from seat)	11" (from seat)	11" (from seat)	11" (from seat)
Arm Length	13"	13"	13"	13"
Arm Pad Length	9"	9"	9"	9"
Tilt Range Posterior	n/a	n/a	n/a	n/a
Rear Internal Width	12"	15"	17"	19"
Seat Heights (Standard casters)	19.3", 20.3", 21.3"	19.3", 20.3", 21.3"	19.3", 20.3", 21.3"	19.3", 20.3", 21.3"
Seat Heights (Long stem casters)	21", 22", 23"	21", 22", 23"	21", 22", 23"	21", 22", 23"
Seat Clearance Height ² (Standard caster stems)	16.3", 17.3" 18.3"	16.3", 17.3" 18.3"	16.3", 17.3" 18.3"	16.3", 17.3" 18.3"
Seat Clearance Height ² (Long caster stems)	18", 19", 20"	18", 19", 20"	18", 19", 20"	18", 19", 20"
DIMENSIONS WITH 5" REAR CASTERS	150	180	185 Wide	186 X-Wide
Overall Width	19"	22"	24"	26"
Overall Length ¹	37"	37"	37"	37"
DIMENSIONS WITH 24" REAR WHEELS	150	180	185 Wide	186 X-Wide
Overall Width	23"	26"	28"	30"
Overall Length ¹	42"	42"	42"	42"

1) Length with all parts extended (wheels highest height, anti-tip bars fully extended, footrests in place)

2) Seat clearance is the measurement from the bottom of the pail rail to the floor.

3) SP Wheels = Self Propelling (22" on the 155, 24" on all other models)